




Features

- cUL, UL, FCC, RoHS, DLC certifications
- Suitable for wet location use
- Fully-sealed housing
- Easy and secure installation
- 50,000-hour lifetime
- 5-year warranty

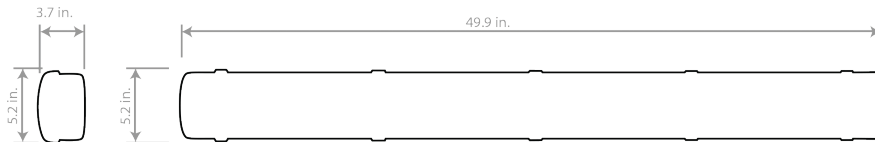

Applications
Residential
Commercial
Hospitality
Retail
Health & Assisted Care
Architectural Decor
Overhead Task Lighting
Parking/Garage Lighting

Specifications		
MMN	ELYVT42C	
Type	Vapor Tight	
Power Consumption	40 W	
Dimmable	No	
CCT	4,000 K	
Luminous Output	4,000 lm	
CRI	> 80	
Wet Location Rated	Yes	
Cover	Frosted	
Input Voltage	120 - 277 V AC	
Luminous Efficacy	110 lm/W	
Power Factor	> 95%	
Operating Temperature	-4 °F to 104 °F (-20 °C to 40 °C)	
Dimensions	Length	Width
	49.9 in (1267.5 mm)	5.2 in (132.1 mm)
	Height	3.7 in (94 mm)

Model Number	Correlated Color Temperature (CCT)
BDVT4004F4	4,000 K



LED VAPOR TIGHT 40W


DLC-LISTED

10081616

Illumination

Illumination Emax fc (lux)	Diameter	Distance
135.15 fc (1,455 lux)	7.82 ft (119.2 cm)	3.28 ft (1.0 m)
33.79 fc (364 lux)	15.64 ft (238.4 cm)	6.56 ft (2.0 m)
15.02 fc (162 lux)	23.46 ft (357.5 cm)	9.84 ft (3.0 m)
8.45 fc (91 lux)	31.28 ft (476.7 cm)	13.12 ft (4.0 m)
5.41 fc (58 lux)	39.10 ft (595.88 cm)	16.40 ft (5.0 m)

Polar Distribution Chart - Units in Candela (cd)

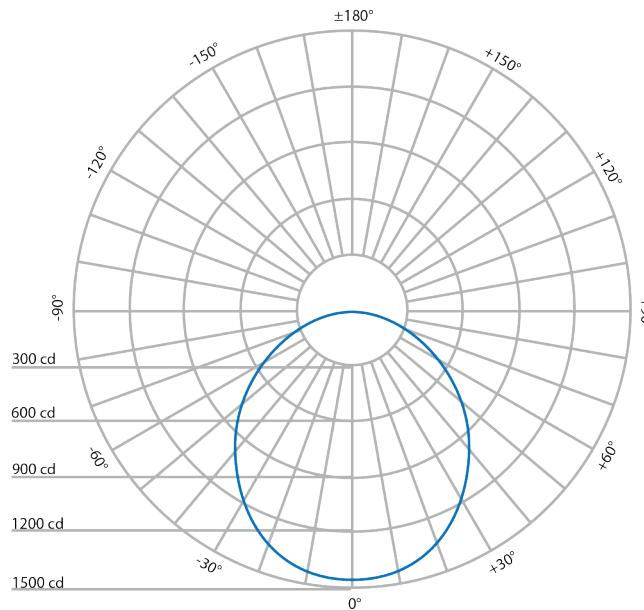

Zonal Lumen Summary

Zone	Lumens	% Total
0 - 20	529.56	11.4%
0 - 30	1120.79	24.2%
0 - 40	1830.52	39.5%
0 - 60	3248.78	70.1%
0 - 90	4407.52	95.0%
Total	4637.22	100.0%