




PROGRAMMABLE LED DRIVER

BPAC1400S50D-4D-EOS




UL
CLASS 2
E328847

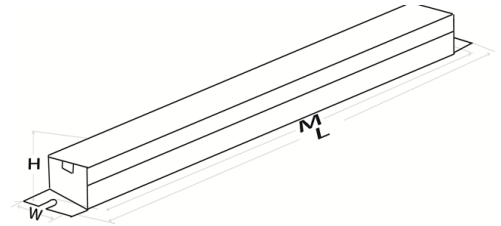

Input Voltage (V)	120	277
Current Type	Constant	
Input Frequency (Hz)	50/60	
Output Voltage (V)	15 - 55	
Output Power (W)	50	
Output Current (A)	0.4 - 1.4	
Input Current (A)	0.5	0.22
Input Power (W)	60	
THD Max (%)	20	
Power Factor	0.9	
Typical Efficiency (%)	85	


Microwave Occupancy Sensor	
Operating Temperature	(-20 to 50 °C) -4 to 122 °F
Sensativity	0-6 m
Time Delay	1 sec - 15 min

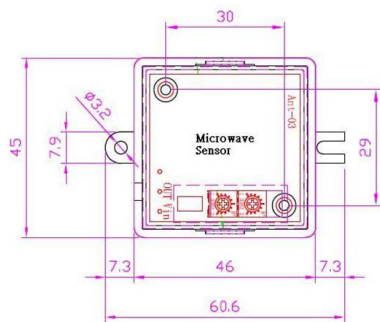

	Length (L)	Width (W)	Height (H)	Mount (M)
cm	6.06	4.5	1.8	5.33
in	2.38	1.77	0.71	2.1

	Length (L)	Width (W)	Height (H)	Mount (M)
cm	32.5	3.4	2.9	31.7
in	12.8	1.35	1.14	12.5

WIRING DIAGRAM

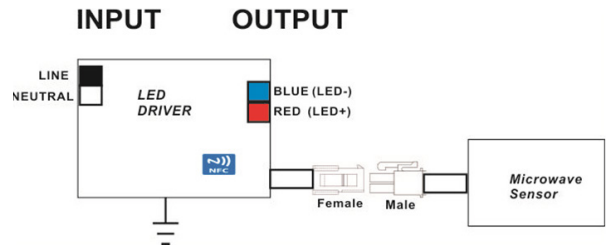

Maximum Wiring Distance (at full load) is 18 AWG/18 Ft.

	cm	in
Black	15	5.9
White	15	5.9
Blue	15	5.9
Red	15	5.9
Purple	18	7.1
Gray	18	7.1
Microwave Sensor	61	24
Male	15	5.9
Female	46	18.1

SENSOR COVERAGE

